

Chemical Dosing Pot Stainless Steel | 8L & 15L

PRODUCT CODE: ADPOTSS08, ADPOTSS15

KEY FEATURES

- Funnel & valve arrangement to enable isolation, draining & re-dosing of the circuit.
- Dosing pots are used for chemical dosing in sealed heating and chilled water systems, adding chemical additives to prevent corrosion of pipes and components.
- Shipped with pictured ball valves for dosing control
- 304 stainless construction.
- No power or dosing pumps are needed.
- Can also be used for dosing Glycol.
- No rust or iron is added to the system due to stainless pot construction.
- 8L is wall mounted, and 15L is floor mounted.
- 10 Bar Design Pressure.
- Suitable for outside external applications
(Funnel can be removed to prevent it filling with rain water)

8L




15L



FlowQuip
Piped Equipment Specialties

Chemical Dosing Pot Stainless Steel | 8L & 15L

PRODUCT CODE: ADPOTSS08, ADPOTSS15

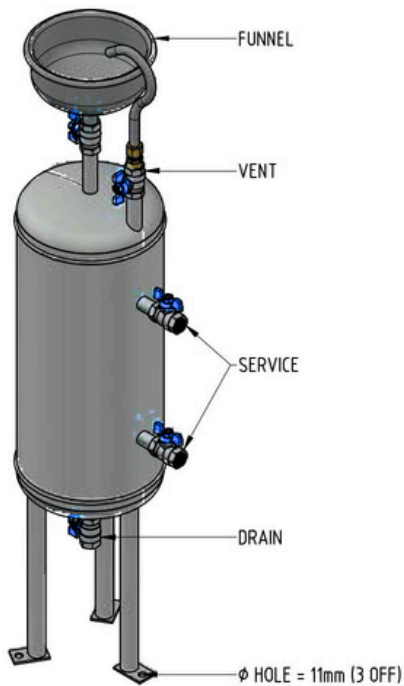

Directions for operation

1. Close isolating valves C & D. Open dosing pot fill Valve A, air-venting valve B, & drain valve E, to empty pot.
2. Close drain valve E, and fill the dosing pot with the appropriate product through the funnel.
3. Close valves A & B to seal pot.
4. Open isolation valves C & D to allow circulation through the pot into the system to be treated.
5. Allow sufficient time for chemical treatment to be flushed into the main system.
6. Close valves C & D to isolate the pot from the main system.

Directions for installation

1. Valve D must be connected to the flow line, or the circulating pump discharge line.
2. Valve C must be connected to the return line, or circulating pump suction line.
3. Valve E is connected to the Trade Waste water system

