

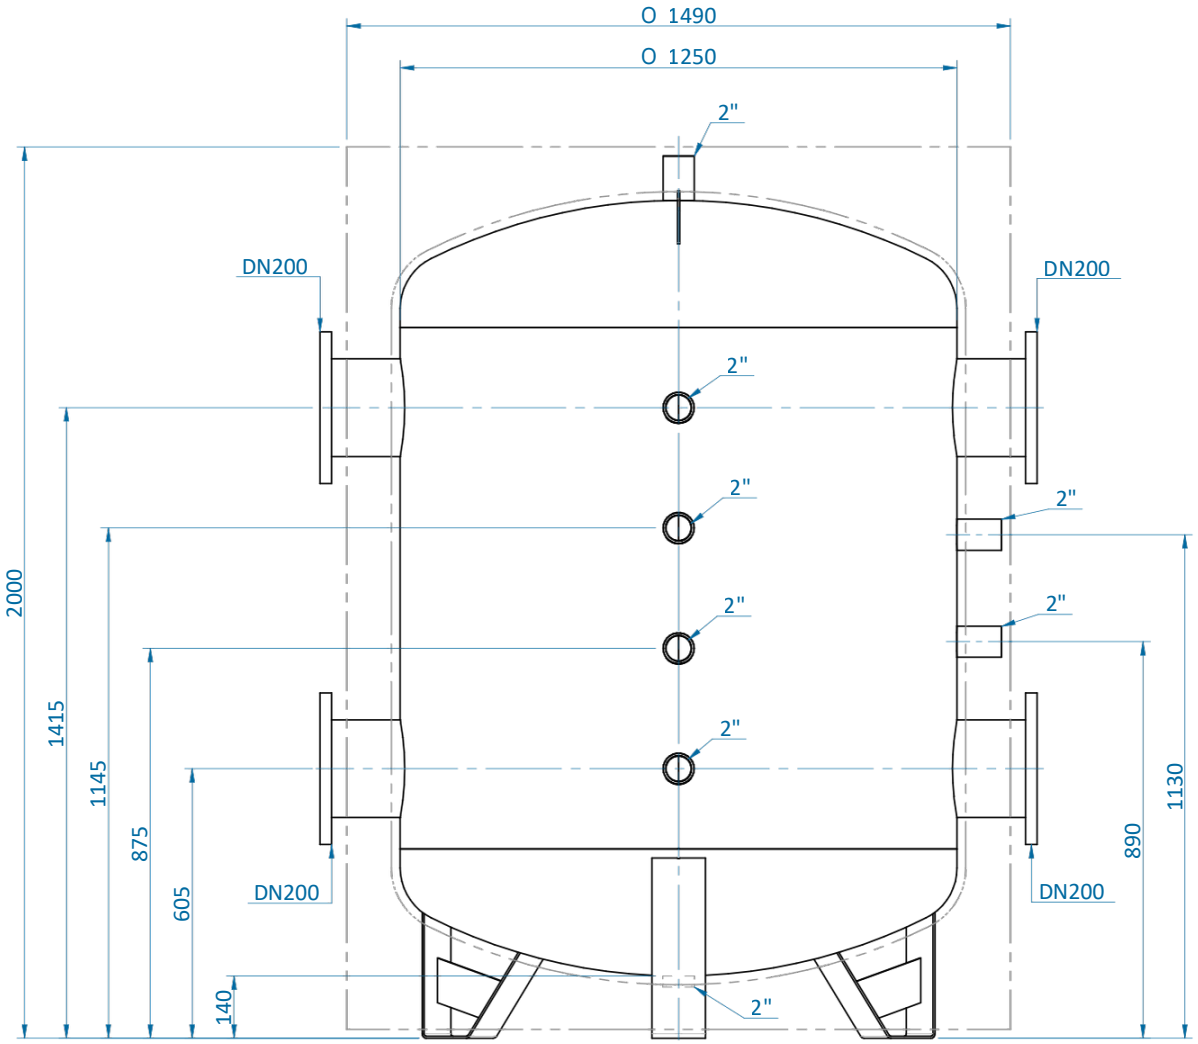

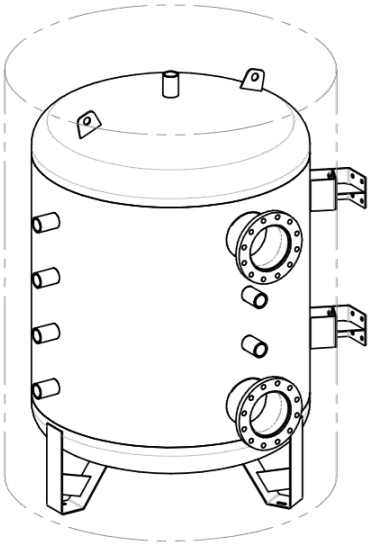

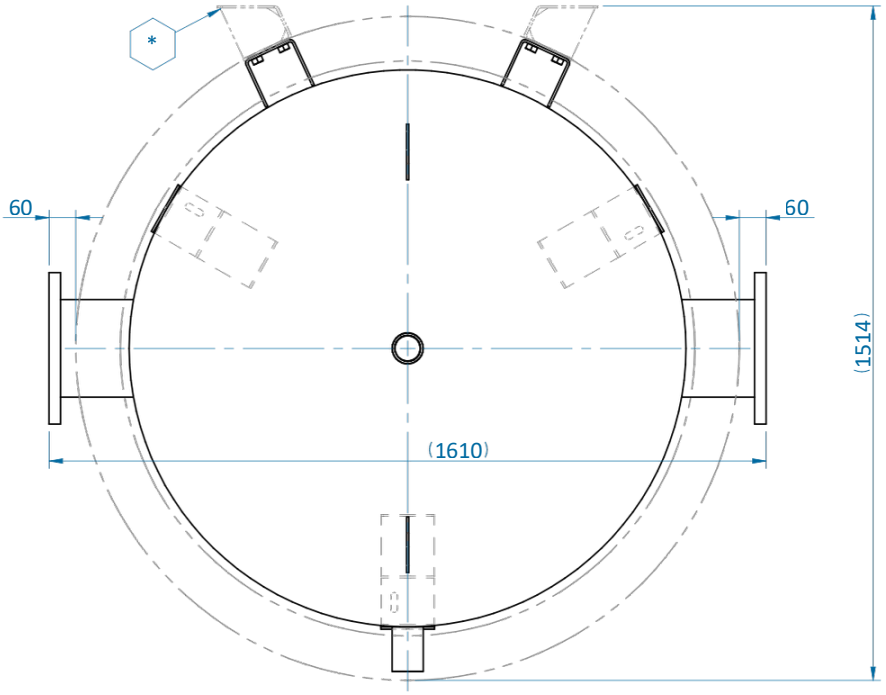

20 mm CLOSE CELL INSULATION + 100 mm FLEXIBLE INSULATION WITH EXTERNAL PVC COVER

PAINTED EXTERIOR

BLACK RAW STEEL INSIDE, ANTIRUST PAINTING OUTSIDE

FLANGES PN 16 UNI EN 1092-1

WORKING PRESSURE: 6 bar
FOR ADDITIONAL SIDE BRACKETS FOR SEISMIC RESTRAINT 291.0 kg DRY WEIGHT.

			DATA
			APPROVED
	REVISION		REVISION
GENERAL TOLERANCE	ISO 2768-v	SCALE 1:12	WEIGHT 291,0kg
TREATMENT/ FINISH		DATE	27/03/2026
MATERIAL		APPROVED	GR
		DESIGNED	MJ
FlowQuip Piped Equipment Specialties	OBJECT: ThermaCon Buffer Tank Carbon Steel 4 Port Flanged, Indoor Insulation 2000 Litre	CODE	TCBT-SIF-2000
			81701F173X

THIS DRAWING IS THE PROPERTY OF FLOWQUIP LTD AND MUST NOT BE RETAINED, COPIED OR USED WITHOUTPERMISSION.