


SSSV Stainless Solenoid Valve Range - All Sizes

PRODUCT CODES BELOW

KEY FEATURES

- 15,20,25,32,40,50mm Sizes
- Function: 2/2 way normally closed
- Viton Seals & gasket
- Operation: pressure assisted, requires Min 0.5 Bar differential
- Coil and plug available in 12VDC, 24VDC, 24VAC, 240VAC and others on request.
- Opening/closing time: Approx. 50ms
- CE approved, class H insulated & IP65 rated coil
- Suitable for use with air, water, light oil and more
- Maximum operating pressure: 0.5 to 10 Bar
- Operating ambient temperature range: -10°C - 60°C
- Process fluid temperature range: -10°C - 90°C

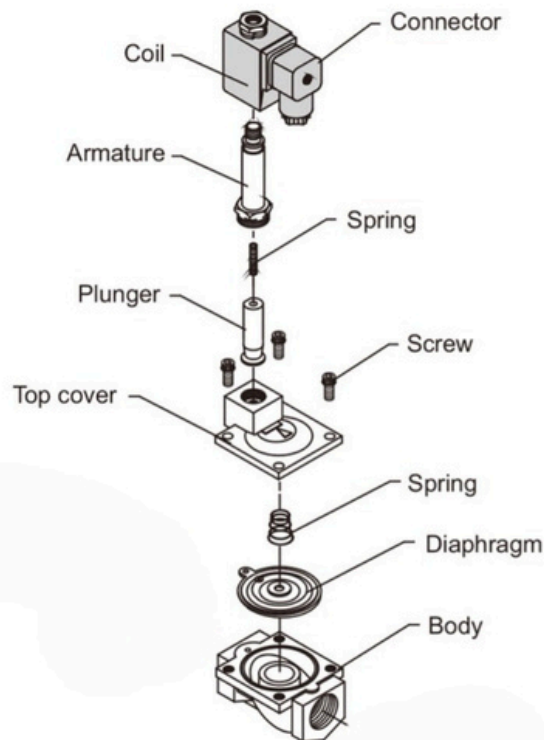

SCAN HERE TO
FIND OUT MORE

FlowQuip
Piped Equipment Specialties

0800 77 78 79

flowquip.co.nz

SSSV Stainless Solenoid Valve Range - All Sizes

SPEC SHEET

Specifications							
Port size	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Fluid	Compressed air (light oil, water)						
Aseries orifice	13mm		25mm		38mm		50mm
Effective area	88mm ²		230mm ²		404mm ²	552mm ²	883mm ²
Acting	Pilot acting VITON (Standard), NBR, EPDM						
Diaphragm	(Option)						
Operating pressure range	0.5 ~ 10 Bar						
Proof pressure	15 Bar						
Body /Flange material	Stainless steel SUS316 / SUS304,SUS316						
Fluid temperature	- 1 0 °C ~ 9 0 °C						
Ambient temperature	- 1 0 °C ~ 6 0 °C						
Installation	Horizontal						
Duty cycle	100% ED						
Coil type	DIN						
Protection class	IP65 (DIN 40 050)						
Insulation class	F						
Voltage tolerance	±10%						
Standard voltage	220VAC, 110VAC, 24VDC, the other voltage is optional						
Power consumption	Normally closed AC110V:17.6VA, AC220V:18.1VA, DC: 15W; Normally open AC: 17.8VA, DC: 15W						
Net weight	775g		1550g		2820g		4665g

Product Code	Variants
SSSV1512-DLP	Coil Voltage: 12VDC Plug: DC LED
SSSV1512-SP	Coil Voltage: 12VDC Plug: Standard
SSSV15240-ALP	Coil Voltage: 240VAC Plug: AC LED
SSSV15240-SP	Coil Voltage: 240VAC Plug: Standard
SSSV1524VAC-ALP	Coil Voltage: 24VAC Plug: AC LED
SSSV1524VAC-SP	Coil Voltage: 24VAC Plug: Standard
SSSV1524VDC-DLP	Coil Voltage: 24VDC Plug: DC LED
SSSV1524VDC-SP	Coil Voltage: 24VDC Plug: Standard



SCAN HERE TO
FIND OUT MORE

FlowQuip
Piped Equipment Specialties

0800 77 78 79

flowquip.co.nz