



DPsense M1 Stainless Tri Clamp/Clova Balancing Valve - Variable Orifice Type

PRODUCT CODE: DPS-M1-IRV-TCSS-** (** size in mm)

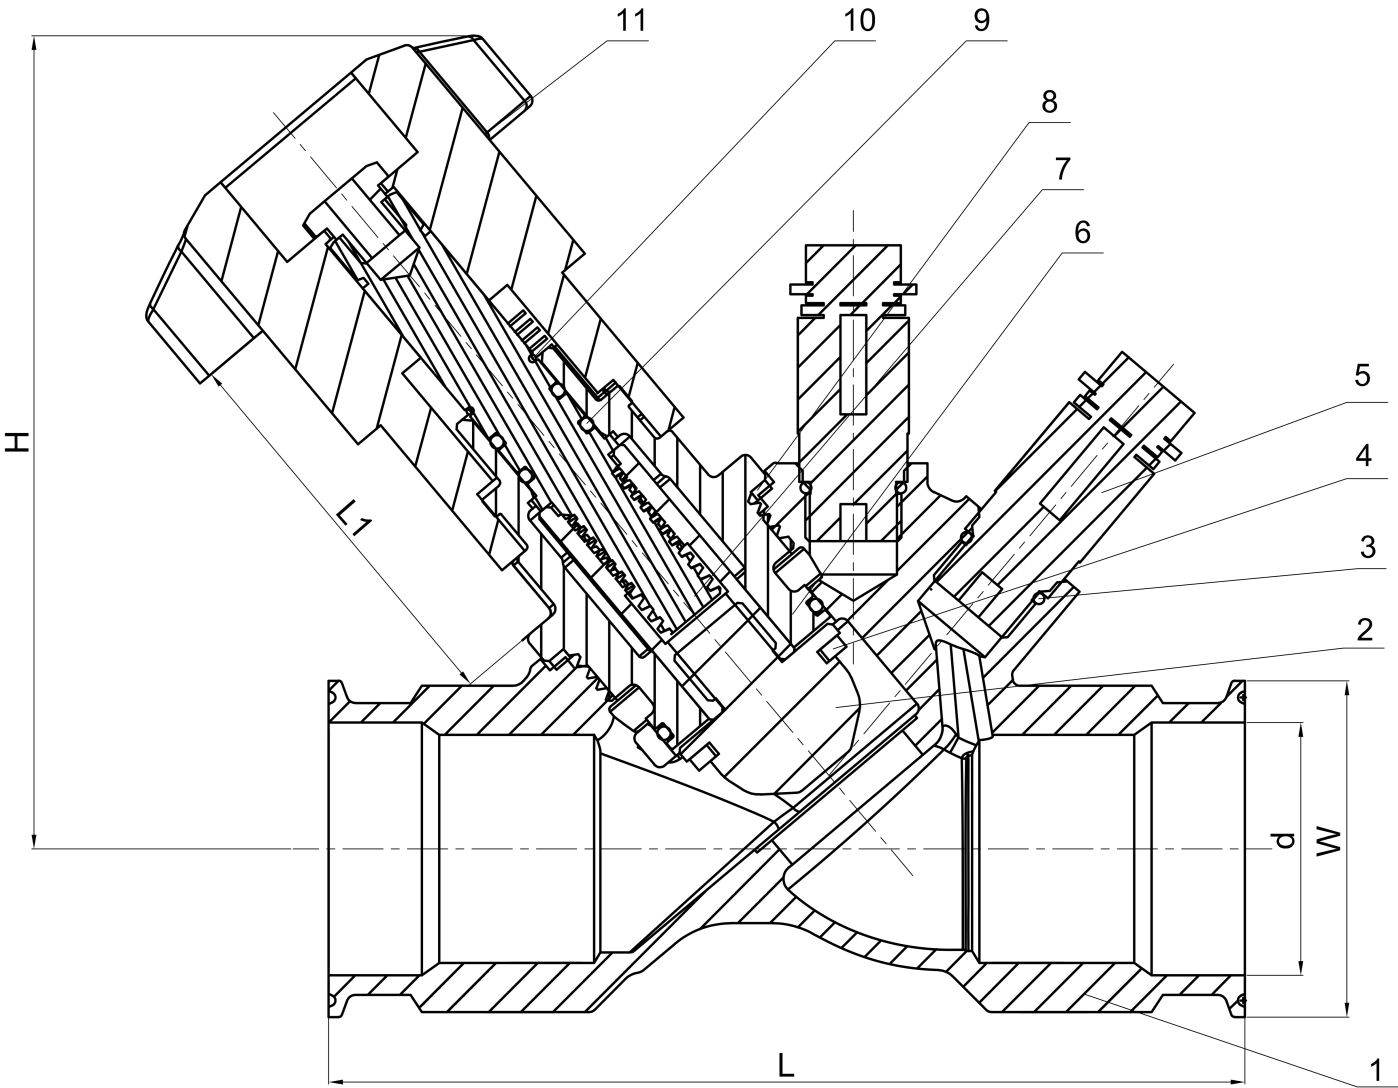

Size DN	3/4" DN20	1" DN25	1-1/4" DN32	1-1/2" DN40	2" DN50
L±2	105	120	130	152	170
H±2	119	119	136	138	148
W	34	50.5	50.5	50.5	64
L1	50	50	50	50	50
d	15.8	24.8	28.55	34.9	47.6

Measurements in mm unless otherwise stated

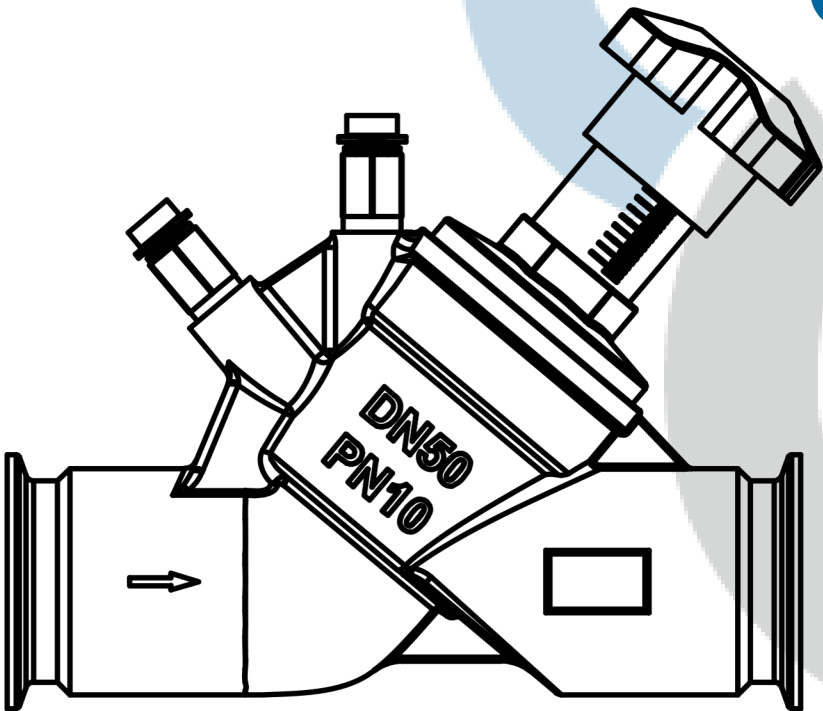

Technical Requirements

- Standard: Manufactured as per BS 7350
- Sanitary Tri-Clamp: AS 1528.4 Clamp
- Nominal Pressure: PN10
- Factory Inspection Project: GB/T 28636-2012

No.	Name	Material	Qty
11	Handwheel	PA66	1
10	Circlip	SS304	1
9	O-ring	EPDM	2
8	O-ring	EPDM	1
7	Stem	SS304	1
6	Bonnet	CF8	1
5	Testing Point	SS304	1
4	Seat	PTFE	1
3	O-ring	EPDM	1
2	Seat	SS304	1
1	Body	CF8	1

Specification	Value
Design Pressure	10 Bar
Test Pressure Shell Test	6 Bar
Test Pressure Seal Test	6 Bar
Suitable Temp Range	-10 to 80°C
Applicable Medium	Water

DPsense M1 Stainless Tri Clamp/Clova Balancing Valve - Variable Orifice Type

KV Value Tree Diagram

